

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005691 A1

(51) International Patent Classification⁷: **F02M 19/08**,
F04F 5/46

(21) International Application Number:
PCT/NZ2003/000137

(22) International Filing Date: 2 July 2003 (02.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
516429 3 July 2002 (03.07.2002) NZ

(71) Applicant and

(72) Inventor: ELLMERS, Peter, Holmes [NZ/NZ]; 8
Moyrus Crescent, Dannemora, Howick, 1705 Auckland
(NZ).

(74) Agent: SERVICE, Murray, John; M. J. Service & As-
sociates, Suite 145, 63 Remuera Road, Newmarket, 1005
Auckland (NZ).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ (utility model), CZ, DE (utility model), DE, DK (utility
model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI
(utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT,
LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK,
SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.



(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: FLUID MIXING VENTURI

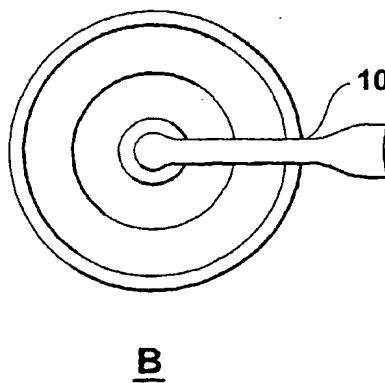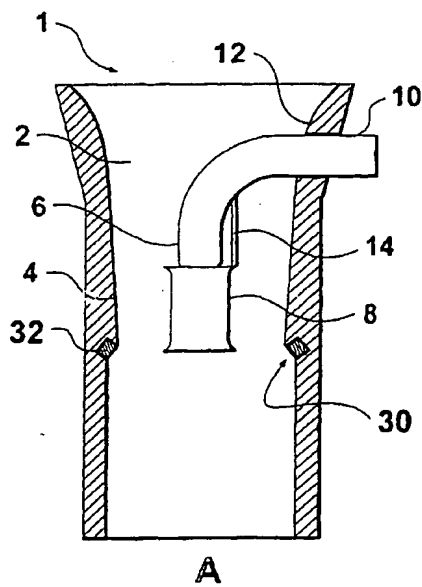

(57) Abstract: A fluid mixing venturi (1) comprises; a venturi barrel (2), a constriction region (4) inside the venturi barrel (2), a fluid outlet nozzle (6) located by a nozzle location device (10) at a central region in the venturi barrel (2) for discharging a fluid into a fluid flowing through the venturi barrel (2), and a booster tube (8) located by a booster tube location device (14) so as to surround a fluid flowing from the nozzle (6).

WO 2004/005691 A1